


# PASSTHROUGHS N1300S EVO 2 HY-NRG



- Electrical connection
- Cold water inlet
- Hot water inlet
- Water drain

## STANDARD FEATURES

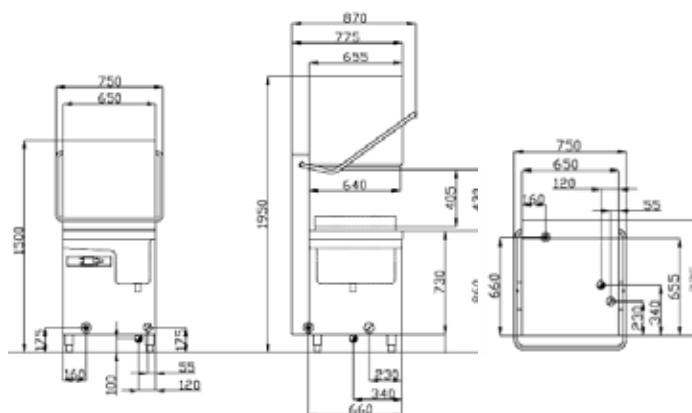

- Double-skinned cabinet and hood, made of stainless-steel AISI 304.
- Press-moulded wash tank with radial corners, inclined to filters
- Easy-clean-filter system.
- Two stainless-steel wash and two rinse arms, independent and rotary.
- Micro security hood.
- Stand-by system for energy saving.
- Peristaltic rinse aid dosing unit, adjusted on control panel.
- HY-NRG rinse function with pressure booster pump keeping set temperature and quantity of water used in rinsing at constant levels.
- Insulated atmospheric boiler and break tank.
- Auto self-cleaning cycle of the wash tank at the end of the service (with rinse pump).
- Innovative electronic control panel with high-resolution colour TFT 45x60mm screen for easy use of the machine.
- Direct control on temperatures, work stage, time and possible anomalies.
- Storing of daily cycle quantity and throughout the life of the machine.
- Four purpose-designed washing cycles for various types of crockery to be washed.
- Two menu levels, protected by a pin code: an operator and a technical menu (after-sales service).

## TECHNICAL FEATURES

Electromechanical panel control	(sec.)	Baskets/h	Plates/h**
Washing Cycle P1 * (42" wash – 5" pause – 13" rinse)	60	60	1.080
Washing Cycle P2 * (82" wash – 5" pause– 13" rinse)	120	30	540
Washing Cycle P3 * (142" wash – 5" pause – 13" rinse)	180	20	360
Washing Cycle P4 * (462" wash – 5" pause – 13" rinse)	480	7	126
Basket size	500 x 500 mm		
Wash pump power/capacity	1,1 kW / 503 l/min		
Rinse boost pump: power/capacity	0,18 kW / 130 l/min		
Element power: tank/boiler	4,8 kW / 10 kW		
Water supply temperature/pressure/hardness	max. 55°C / 200 - 400 kPa / min. 7 max. 12°f ***		
Washing/Rinsing temperature	55°C / 85°C		
Capacity: tank/boiler/water consumption per cycle	30 l / 12 l / 2,8 l		
Sound emission dB (A)	69		
Total power/Voltage	11,1 kW / 400 Volt 3/N/50 Hz		

\*Theoretical data with water supply at 50°, P1 cycle for light-dirty dishes

\*\*Depending on plats size

\*\*\*Where water hardness exceeds 12°f or 100ppm a water softener is required. Water softener is not suitable for hot water above 30°.

# PASSTHROUGHS N1300S EVO 2 HY-NRG



## ACCESSORIES

Baskets	2x18 plates, 1 universal basket, 1 cutlery rack
Hoses (1 for each)	Water connection, drain, transparent rinsing product

## OPTIONAL ADD-ONS

- Integral water softener with auto-regeneration cycle, adjustable according to water hardness. (A). Salt level indicator.
- Peristaltic detergent dosing unit (PD), identified by a red hose and adjusted on control panel.
- Integral drain pump (PS).
- Reverse osmosis system (RO) with by-pass. In case of system anomalies, it is possible to use the machine anyway.
- By-pass solenoid draining regeneration water directly into the drains.
- Wi-Fi connection to send text message for feasible anomalies or informative message on the machine status.
- Steam condenser and heat recovery system (CRV).

All data, photos or indications on this technical sheet are given for information and have no contractual value. They are subject to change without notice.